

MERRIDALE

AUDITOR GS TWIN

**Zware industrie
brandstofpomp met
geïntegreerd brandstof-
registratiesysteem.**



GS TWIN

Features

- Dubbele afleverslang (gelijktijdig te gebruiken)
- Afleversnelheden van 50 tot 150 ltr./min.
- Hoge meetnauwkeurigheid $\pm 0.25\%$
- Geschikt voor diesel, gasolie, bio-diesel en bio-ethanol
- Robuuste constructie, voorzien van verlichte displays
- Robuust metalen toetsenbord
- Eenvoudig te onderhouden
- Lange levensduur
- Optionele configuratiemogelijkheden
- Mogelijkheid tot koppeling met andere gangbare pompen
- Optionele communicatiemogelijkheden (serieel, LAN, GSM, GPRS, etc.)
- Uitbreidbaar met tankinhoud meetsysteem
- Uitbreidbaar met wascontrole of toegangscontrolesysteem



Op alle Merridale producten 10 jaar ondersteuning

Fuel Management
One Solution
www.merridale.co.uk

Installation Specification (Diesel/Gasoil Installations only)

Spare Part Description	Part no.
Datakey	SFX100
Management Datakey (green)	SFX217
Datakey reader	SFX101
FX101 PC board complete	SGX170
Auditor GS EPROM upgrade	SFX212
IC33 MAX202 RS232 driver chip	SFC178
Power supply complete	SFX190
2x20 backlit LCD screen	SFX150
25A solid state pump relay	SFX180
Numeric keypad (non-illuminated)	SFX140
Numeric keypad (illuminated)	SFX140/A
Metal alphanumeric keypad	SFX145
ZVA 25mm nozzle	SFP138
ZVA 20mm nozzle	SFP137
Scuff guard (please specify colour)	SFP151
Splash guard (please specify colour)	SFP152
3.0m hard wall hose 1" BSP	SFP131
Break off coupling 1"	SFP136
Break off coupling 3/4"	SFP136/A
High hose mast	SFP150
Pumping unit (Diesel/Gasoil only)	SFP104
Metal pump filter	SFP109/A

other spares available on request

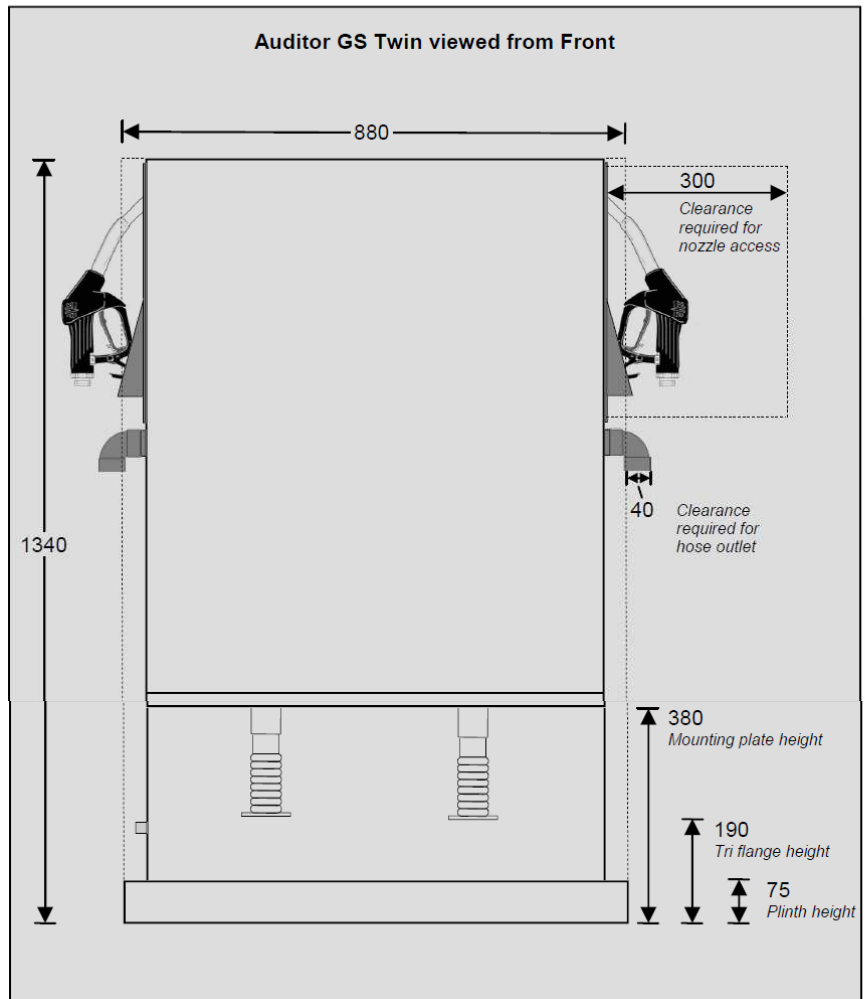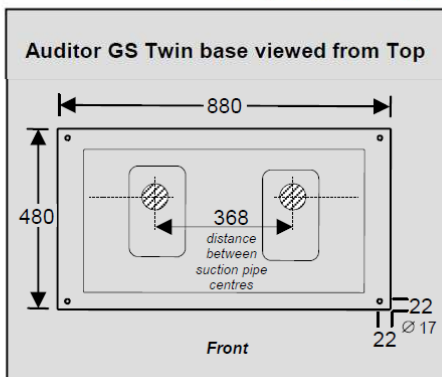

Cable Specifications

Main power to GS	2 x 3 core 2.5mm ² PVC SWA	NB A 2nd pump (optional) must have a separate mains supply, fed from a suitable RCD/MCB distribution board.
Switched supply from GS to pump	3 core 1.5mm ² PVC SWA	NB All internal pump switches (nozzles, resets etc) should be suppressed. Suppressors available from Merridale.
Pulsar from pump to GS	3 core 1.0mm ² PVC SWA	NB This assumes a Merridale Commercial Pump. Other pumps with mechanical pulsers may only require 2 core.
Data cable	Number of Cores: 4 Core Size: 0.22mm ² Core Type: 7 Strand Tinned Copper Core Insulation: 0.25mm PVC	Screen: Overall Tinned Copper Braid Outer Sheath: Grey PVC Max Working v: 440v
		Max Current per Core: 1A Core/Screen Capacitance: 180pF/m Resistance per Core: 88 Ω/m

Pump Pressure

Expected normal working pressure	
Nozzle closed	25 - 28 psi
Nozzle open	16 - 18 psi

Electrical Specification & Connections

	50 / 70 / 90 ltr/min	150 ltr/min
Voltage	240VAC 50Hz	
Max running current	3A	6A
Breaker size (recommended)	6A motor rated	10A motor rated
Breaker type (recommended)	MCB	

Hydraulics



Genuine Bennett hydraulics inside



Voets Installaties B.V.
Ellerweg 16
6037 RS KELPEN-OLER
Web: www.voetsinstallaties.nl

Tel: +31 (0)495 651 385
Fax: +31 (0)495 652 128
Email: info@voetsinstallaties.nl

MERRIDALE

Fuel Management
One Solution
www.merridale.co.uk